


MEDITE[®]

PREMIER

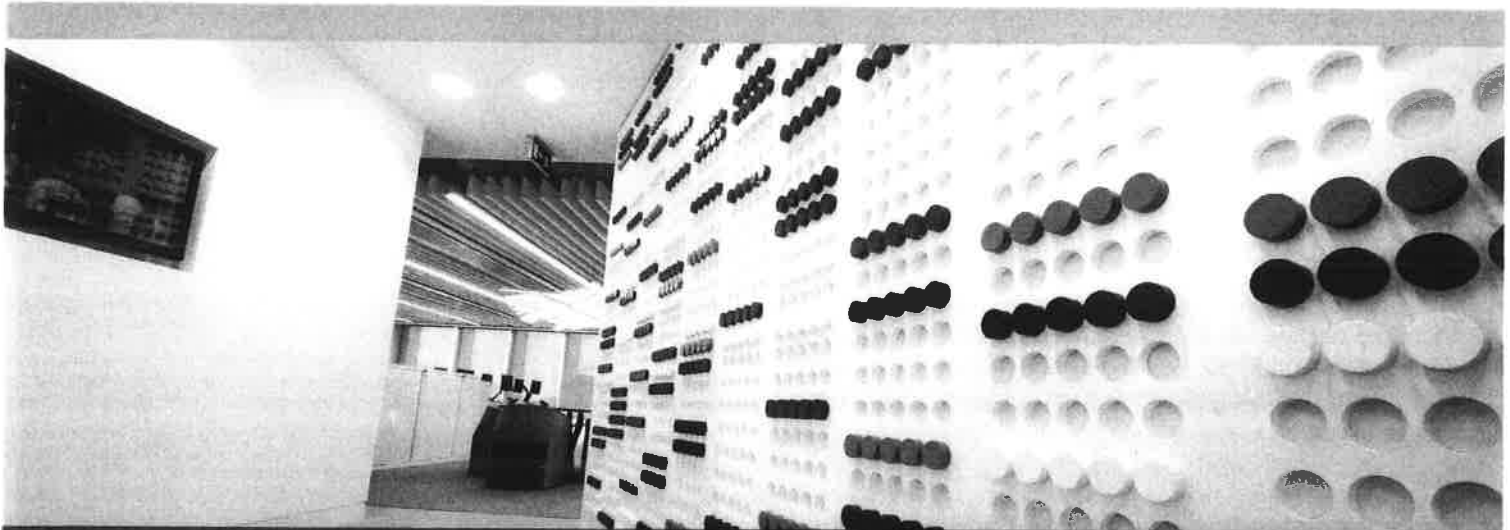

MEDITE PREMIER MDF is produced using superior wood refining technology and specially designed resins. Excellent face properties make it suitable for the thinnest laminates and surface coatings. End-users enjoy consistency of quality and thickness, as well as reduced tool wear. Developed at MEDITE's world class MDF facility in Clonmel, MEDITE PREMIER sets the standard and broadens the range of the MEDITE family of high performance MDF products.

APPLICATIONS

The range of product applications for MEDITE PREMIER MDF includes contemporary and reproduction furniture, children's toys, snooker tables, shopfitting, hi-fi speaker cabinets and doors. MEDITE PREMIER comes in a wide selection of thicknesses. The remarkably consistent MEDITE PREMIER ensures that the most sophisticated finishing and processing techniques can be completed, offering great design freedom.

PERFORMANCE

MEDITE PREMIER is suitable for use in internal dry conditions as defined in EN 622 parts 1 and 5 and conforms to EN13986. Boards of this type are suitable for use in Hazard Class 1 of EN 335-3.

APPEARANCE

MEDITE PREMIER retains the light tan colour of the wood fibre from which it is manufactured.

MACHINING/FINISHING

Cut or profiled edges of MEDITE PREMIER should first be sanded with 150-240 grit, prior to painting. The recommended coating system for the edges is to seal, prime and topcoat with de-nibbing in between coats to produce a smooth finish. The desired finish on the face can be achieved by application of a base-coat and top-coat. If water-based coatings are used, it is important that forced drying or quick-drying systems be applied in order to maintain the quality of surface.

CONDITIONING

The moisture content of MEDITE PREMIER is in the range of 5-9% at the time of manufacture. Changes in dimensions of wood and wood-based sheet materials occur due to changes in relative humidity. For this reason, MEDITE PREMIER panels should be conditioned to the final environment for two to three days before cutting and fixing.

FIRE RATING

MEDITE PREMIER is expected to achieve a fire class rating of Euroclass D within the European classifications.

MEDITE® PREMIER

AUTHORITY

MEDITE PREMIER is manufactured under an NSAI registered I.S. EN ISO 9001 quality management system.

SUPPLY

MEDITE PREMIER is produced in the following sizes:
1220 x 2440mm, 1220 x 2745mm, 1220 x 3050mm,
2440 x 1830mm, 1525 x 2440mm, 1525 x 2745mm
and 1525 x 3050mm.

Standard thicknesses produced are: 3, 4, 6, 9, 12, 15, 16, 18, 19, 22, 25, 30, 32, 36, 38 and 40mm. Other sizes and thicknesses available on request subject to minimum order quantities.

SERVICE

For further information and/or technical advice regarding processing and painting/finishing MEDITE PREMIER, please contact MEDITE Technical Support Personnel:

UK: +44 (0) 1322 424900

Ireland: +353 5 181 0205

Germany: +49 32221097221

France: +33 975189830

Netherlands: +31 858886230

Belgium: +32 28086256

MEDITE PREMIER MDF TECHNICAL SPECIFICATION SHEET

| PROPERTY | RANGE | TEST METHOD | UNITS | 3.0 to 4.0mm | >4.0 to 6.0mm | >6.0 to 9.0mm | >9.0 to 12.0mm | >12.0 to 19.0mm | >19.0 to 25.0mm | >25.0 to 30.0mm | >30.0 to 40.0mm |
|----------------------------|---------|-------------|-------------------|--------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|-----------------|
| Internal Bond | Min | EN 319 | N/mm ² | 0.90 | 0.80 | 0.80 | 0.55 | 0.55 | 0.55 | 0.55 | 0.50 |
| Modulus of Rupture | Min | EN 310 | N/mm ² | 38.0 | 40.0 | 40.0 | 27.0 | 24.0 | 25.0 | 28.0 | 26.0 |
| Modulus of Elasticity | Min | EN 310 | N/mm ² | 3,800 | 4,000 | 4,000 | 2,700 | 2,400 | 2,700 | 2,600 | 2,600 |
| Screw Holding Face | Min | EN 320 | N | - | - | - | - | 1000 | 1000 | 1000 | 1000 |
| Screw Holding Edge | Min | EN 320 | N | - | - | - | - | 600 | 600 | 600 | 600 |
| Moisture Content | Min-Max | EN 322 | % | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 | 5.0-9.0 |
| Thickness Tolerance | Min-Max | EN 324-1 | mm | +/-0.15 | +/-0.15 | +/-0.15 | +/-0.15 | +/-0.15 | +/-0.15 | +/-0.15 | +/-0.15 |
| Thickness Swelling (24hrs) | Max | EN 317 | % | 35.0 | 25.0 | 17.0 | 11.0 | 9.0 | 6.0 | 5.0 | 5.0 |

DIMENSIONAL MOVEMENT

| | | | | | | | | | | | |
|--------------|--|--------|---|------|------|------|------|------|------|------|------|
| Length/Width | | EN 318 | % | 0.40 | 0.40 | 0.40 | 0.40 | 0.30 | 0.25 | 0.25 | 0.25 |
| Thickness | | EN 318 | % | 6.0 | 6.0 | 6.0 | 5.0 | 4.0 | 4.0 | 4.0 | 4.0 |

The results as listed above are based on the minimum specification requirements for all PREMIER MEDITE MDF manufactured by MEDITE EUROPE DAC Ltd. All board parameters are in compliance with EN 622 parts 1 & 5. As part of the MEDITE EUROPE DAC ongoing product development programme, the right to modify these product specifications without notice is reserved. MEDITE PREMIER conforms to E1 formaldehyde levels as well as also complying with the lower levels required by CARB phase 2.

This leaflet is provided for information purposes only and no liability or responsibility of any kind is accepted by MEDITE EUROPE DAC or their representatives. MEDITE EUROPE DAC have used reasonable efforts to verify the accuracy of any advice, recommendation or information. MEDITE EUROPE DAC reserves the right to alteration of its products, production information and range without notice. As we continually update our technical datasheets please check on www.mdfosb.com to ensure you have the latest version.



The mark of
responsible forestry
FSC® C020700



V 05/17

All MEDITE MDF products supplied for use in the construction and civil engineering industries are CE marked according to the requirements of the harmonised European standard for wood based panels EN 13986. This provides the necessary assurance to customers and users that MEDITE conforms with the European MDF standard, EN 622-5 and meets all the essential requirements for the Construction Products Directive that are relevant to the product.

In accordance with the provisions of Third Party Certification required within the Final Regulations Order of the Airborne Toxic Control Measure (ATCM) by the California Air Resources Board (CARB) all MEDITE MDF products are CARB Phase 2 Compliant. The approved Third Party Certifier (TPC) Entwicklungs-und Prüflabor Holztechnologie GmbH (EPH – TPC No W-08-010) is contracted by MEDITE to perform the quarterly assessment of the factory production control and to have the stipulated formaldehyde tests carried out by the accredited EPH test laboratory.